

Hybrid Flash Storage Arrays




Tegile T3200

Balanced

Higher performance for workloads that require improved I/O such as larger-scale VDI, server virtualization and databases.

Tegile IntelliFlash data reduction techniques can improve effective capacity by up to 10x.

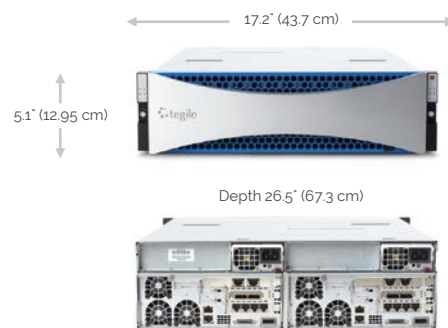

Model	T3200
Platform Configuration	
Type	Hybrid Array
DRAM Memory	192 GB
Flash Memory	2 TB
Storage Capacity	
Min / Max: Raw Capacity	36 / 180 TB
Physical	
Form Factor (Rack Units)	3U
Weight (Lbs)	90
Power (W)	535
Network Connections	
1 Gbps Ethernet Ports	12
1 Gbps IP-KVM Lights-out Mgmt. Port	2
Optional Connectivity	Dual-port 4/8 Fibre Channel, Dual-port 10 GbE Copper/Fiber, Quad-port 1 Gbps Ethernet
Expansion Shelves	
ESH – 20/25/35	Up to 4 shelves
ESH – 65	Up to 2 shelves
Software Services Included	
Protocols	SAN (iSCSI, FC), NAS (NFS, CIFS, SMB)
Data Services	De-duplication, Compression, Thin Provisioning, Snapshots, Remote Replication, Application-Aware Provisioning
Data Security	Inline 256-bit AES encryption for data at rest (available only on factory-installed arrays with IntelliFlash OS 3.x)
Management	Web browser, SSH, IP-KVM
Redundancy	No single point of failure, Active-Active High Availability Architecture
Warranty	
Basic	24x7 support via email and phone, next business day hardware replacement for defective parts and software updates for first 90 days.
Optional	See IntelliCare Support Program for more information