

All-Flash Storage Arrays




Tegile T3600

All-Flash for Primary Workloads

Ideal for those looking to accelerate business applications that require high I/O and low latency.

Tegile IntelliFlash data reduction techniques can improve effective capacity by up to 10x.

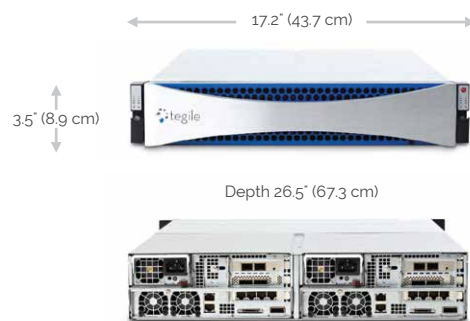

Model	T3600
Platform Configuration	
Type	All-Flash Array
DRAM Memory	192 GB
Flash Memory	9.6 TB
Storage Capacity	
Min / Max: Raw Capacity	9.6 / 298 TB
Physical	
Form Factor (Rack Units)	2U
Weight (Lbs)	80
Power (W)	450
Network Connections	
1 Gbps Ethernet Ports	12
1 Gbps IP-KVM Lights-out Mgmt. Port	2
Optional Connectivity	Dual-port 4/8 Fibre-Channel, Dual-port 10 GbE Copper/Fiber, Quad-port 1 Gbps Ethernet
Expansion Shelves	
ESF-10/25/50	Up to 4 shelves
ESF-145	Up to 2 shelves
Software Services Included	
Protocols	SAN (iSCSI, FC), NAS (NFS, CIFS, SMB)
Data Services	De-duplication, Compression, Thin Provisioning, Snapshots, Remote Replication, Application-Aware Provisioning
Management	Web browser, SSH, IP-KVM
Data Security	Inline 256-bit AES Encryption for Data-at-Rest (available only on factory-installed arrays with IntelliFlash OS 3.x)
Redundancy	No single point of failure, Active-Active High Availability Architecture
Warranty & Support	
Basic	24x7 support via email and phone, next business day hardware replacement for defective parts and software updates for first 90 days.
Optional	See IntelliCare Customer Care Programs for more information